


Step1: How to connect the audio device

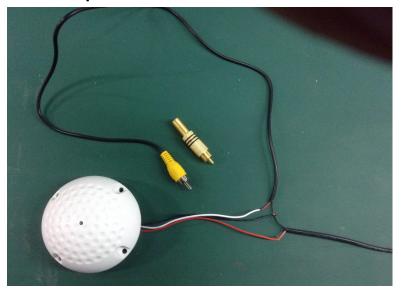


(the functions of the yellow connector and the golden connector are same) pic1:connect with the power

(Sound picker have 3 per caples) black, white red

(Sound picker have 3pcs cables) black, white, red.


1.1: The black wire and red wire is connect to the power, the power supplier is 12V 1A (Red wire is the positive pole. Black wire is the negative pole.)

1.2: The black wire and white wire is for the audio input. (so the black wire have two functions)

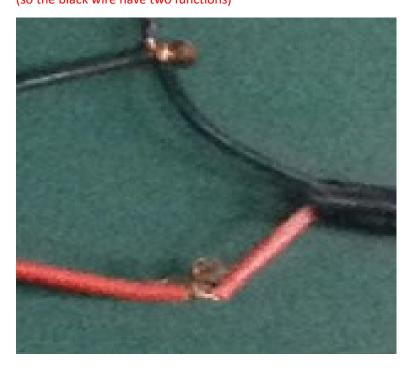



Pic2: connect with the audio input

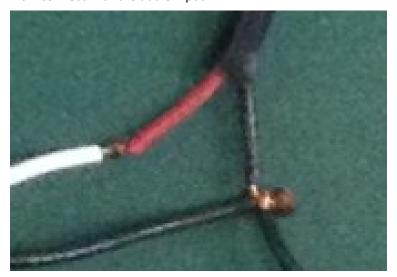

The white cable is the positive pole, the black cable is the negative pole

(you need buy it in your local market and the connection cables, it's same like the yellow one, see below picture.)








3. Connect the audio AV port to the audio input connector of the camera(red one), the connection is finished.

Step2 how to test the audio



Open the IE and login the camera, click the audio button(please notice that, the testing PC should support playing sound).

- ! please notice that keep away from the sound picker and PC,(3 meter away is recommend)
- ! if you want to adjust the sound monitor scope, please open the sound picker, then adjust the blue button.





IPCC Technology CO.,Ltd.

Address: Building E, Dahong Science&Technology Park, 1st Industrial Area, Baihua Road, Guangming District, Shenzhen, P.R. China

Tel: 86-755-23416862 -666(Ext.)

Fax: 86-755-23416862 Mobile phone:86-13480787575 Email: support@ipccam.com

Skype: ipccam

Website: www.ipccam.com